


H_{1/2}2000

Standing Flower Tower

Specification

(mm)

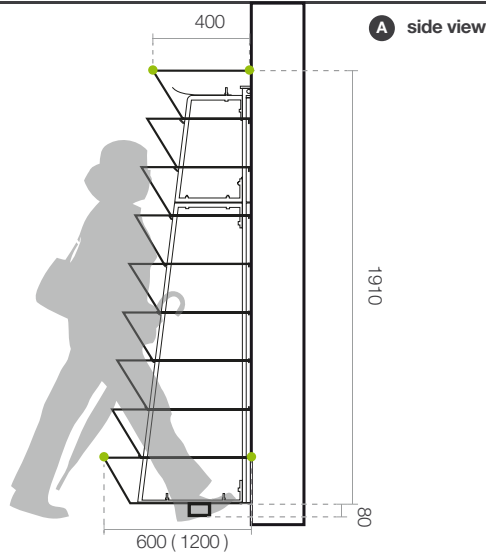

! Beware of imitations!

It is impossible to copy quality and safety. Only products branded with Terra's sign can provide the highest quality, safety and accuracy of execution.

Product protected by patent

✓ P 379058


Registered design

✓ Wp 9324-25

 Made in Europe

 36 month warranty

Number of rings	9	Weight before planting	62 kg
Capacity	584 l	Weight after planting	300 - 575 kg 
Total height	1990 mm	Estimated amount of seedlings	55 - 65 pieces
Base diameter	1/2 1200 mm	Warranty	36 months

 Weight depending on the type of soil and its moisture

Terra Cascading Flower Towers include a 3-year warranty program called "DOOR TO DOOR". In practice it is an extensive system of support and technical assistance, as well as an extremely efficient service guarantee. Product's flaws will promptly be fixed by our service team in any place designated or new products will be delivered.

Colours (DUPLEX)



DUPLEX System

The combination of a galvanized layer and a polyester powder coat gives an extraordinary resistance. The top coat of paint, which supposed to be a decoration, becomes an additional anticorrosive layer.

Production method

- laser-cut rings
- MAG / TIG welded rings
- hot dip galvanized
- powder coated rings (DUPLEX system)

Safety

- rubber gasket on each ring
- no sharp edges
- heavy and stable
- high resistance to vandalism
- can be fixed to the ground




H_{1/2}2000


Standing Flower Tower

Transport
(mm)

A Side view

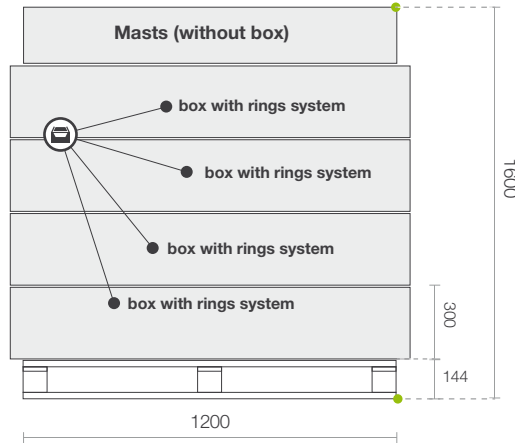

B Side view

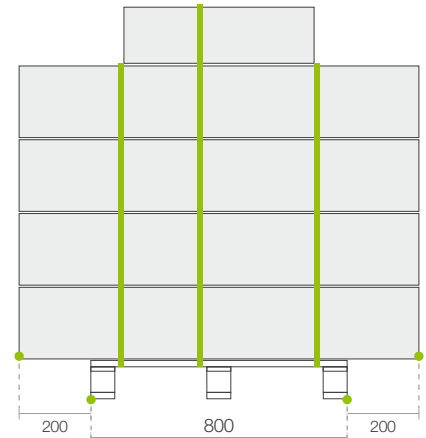

 2 SETS PACKED IN A BOX


UP TO **8** SETS FOR A EURO PALLET

Set contents

Lower pan with legs	1 item	Mast (profile 50x20 mm)	1 item
Half-rings	8 items	Mast (profile 60x30 mm)	1 item
Conical screw 8x50	4 items	Upper span	3 items
Screw 10x50	14 items	Lower span	3 items
Screw 10x90	4 items	Security flat bar	2 items
Screw 6x20	7 items	Gasket / glue	20m / 2 items

Additional accessories

 anti-theft system




A




side view

B



upper view

 transport module



A




front view

B



side view

 watering system **TerraClick Tif**

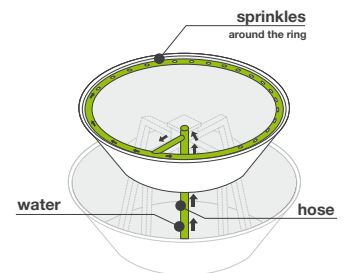

number of lines in the system: 5
 type of connector: GEKA
 flow of drippers: 2 - 3 l/h
 pressure: 0,5 - 4 atm
 opening pressure of the anti-drip: 0,4 atm
 closing pressure of the anti-drip: 0,2 atm
 hose type: **new generation**
 resistant to chemicals
 and acidification

